



Superconductivity

1. Basic phenomenon

- Discovery of superconductivity by H.K. Onnes (1911):

Resistance of Hg abruptly drops to **zero** below $\sim 4.2\text{K}$.

Critical temperature (T_c).

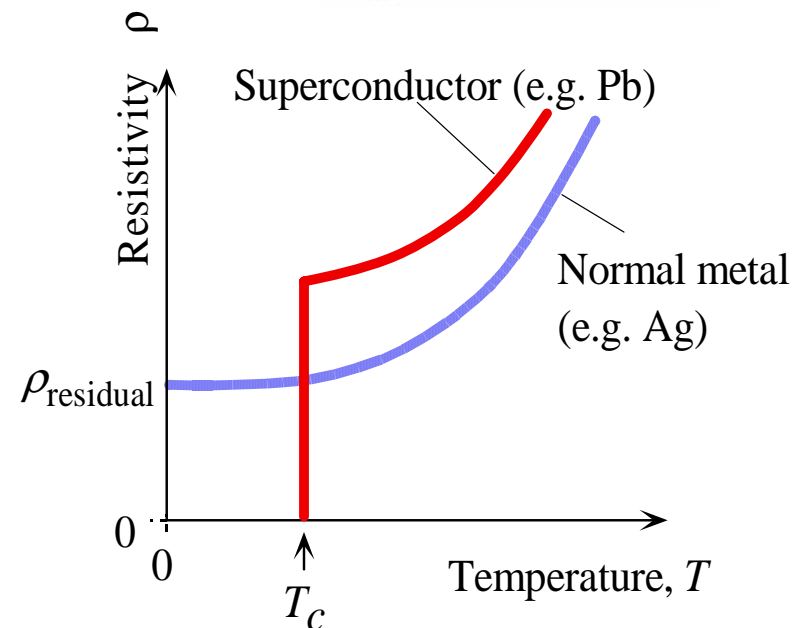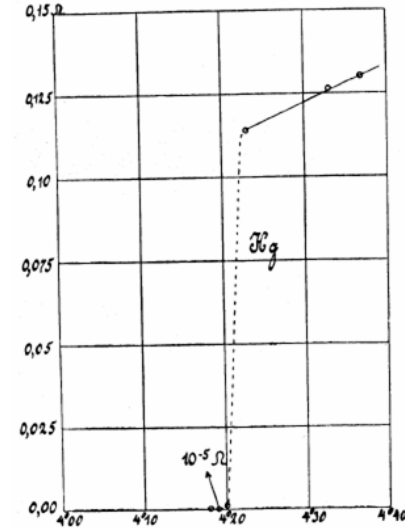


- **Persistent current** in a superconducting loop:
An induced current in a superconducting loop circulates forever.

- Occurrence of superconductivity

a) Conventional superconductivity: metals ($T_c < 10\text{K}$), alloys and compounds ($T_c < 40\text{K}$), organic materials ($T_c < 40\text{K}$);

b) High- T_c superconductivity: Copper perovskites (cuprates) ($T_c < 140\text{K}$)

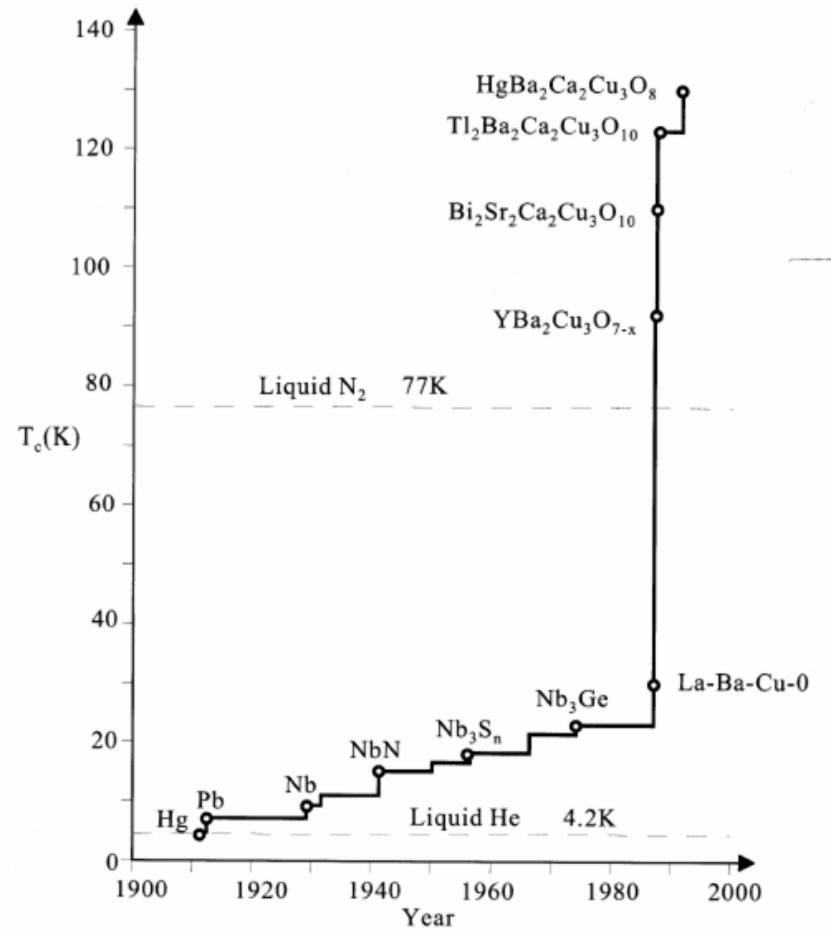

2. Effect of Magnetic Field

- Critical Field

A strong enough magnetic field ($H > H_c$) destroys superconductivity even below T_c .

$$H_c(T) = H_c(0) \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

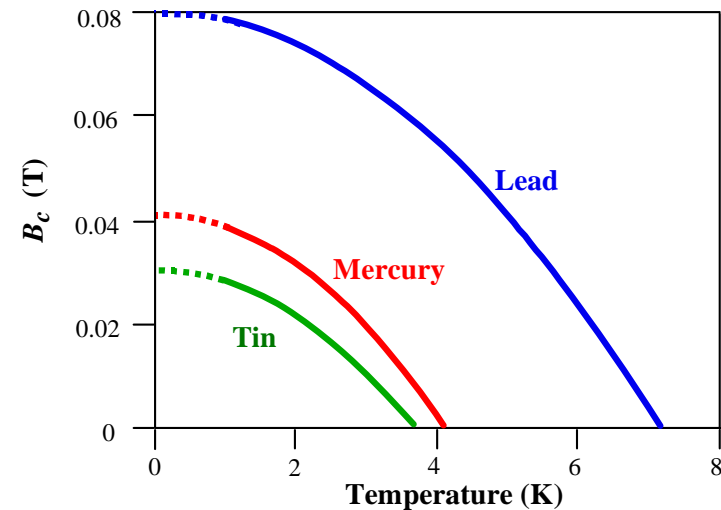
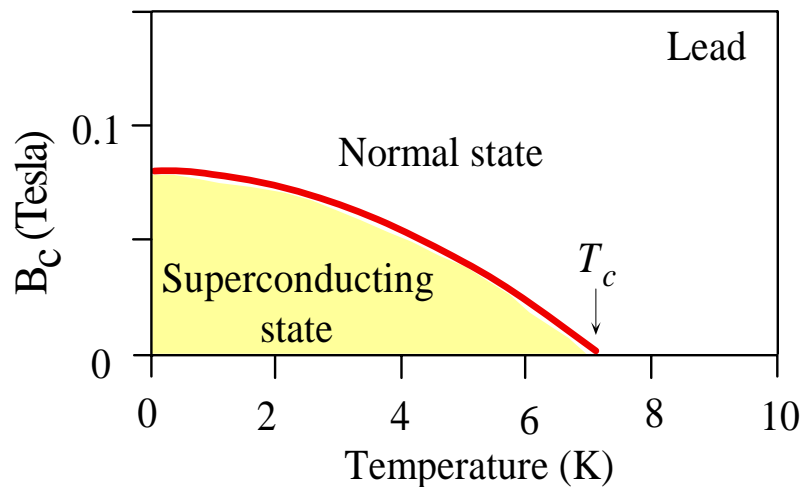



Fig. 8.46: The critical field vs temperature in Type I superconductors. Fig. 8.47: The critical field vs temperature in three examples of Type I superconductors.

- Meissner Effect




A superconductor expels magnetic flux completely - perfect diamagnetism.

$$B = 0 \rightarrow M = -H$$

Superconductor
VS
Perfect conductor

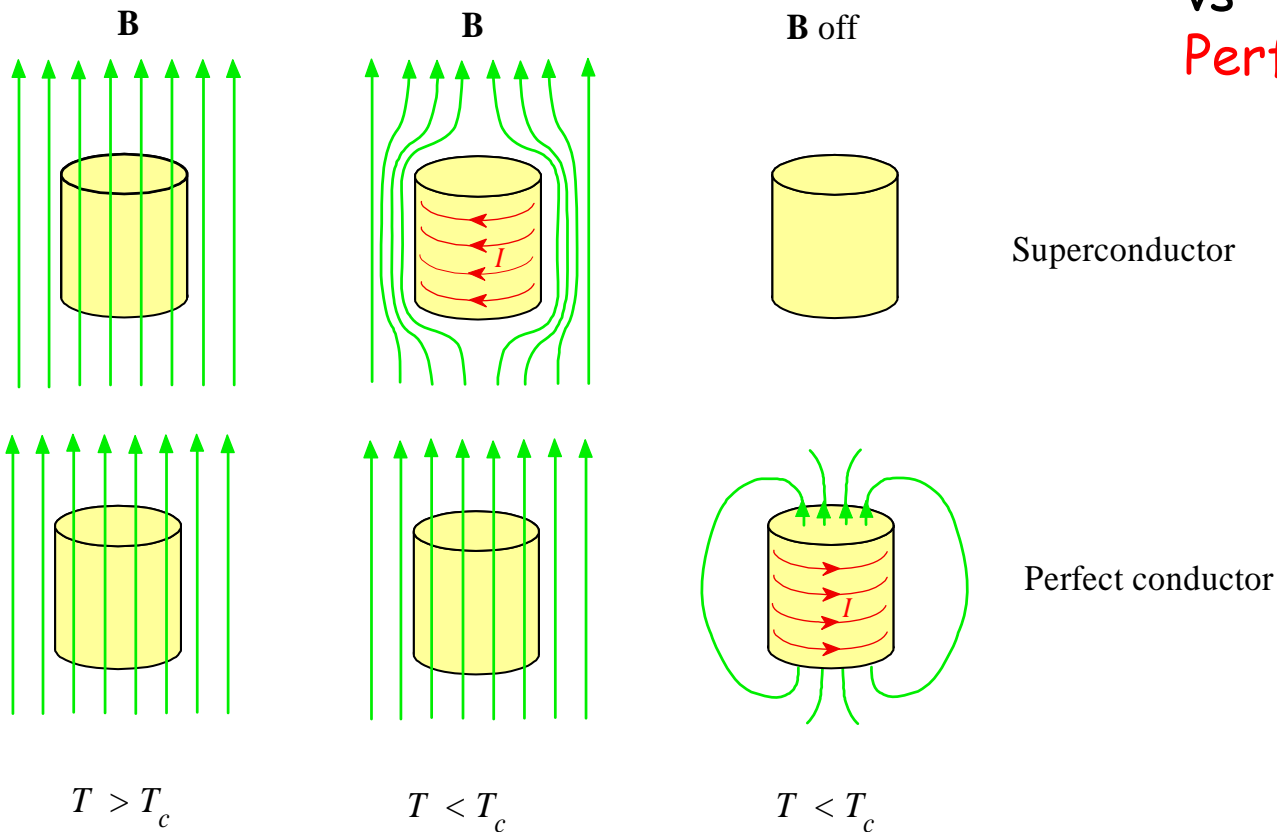

Magnetic Levitation:

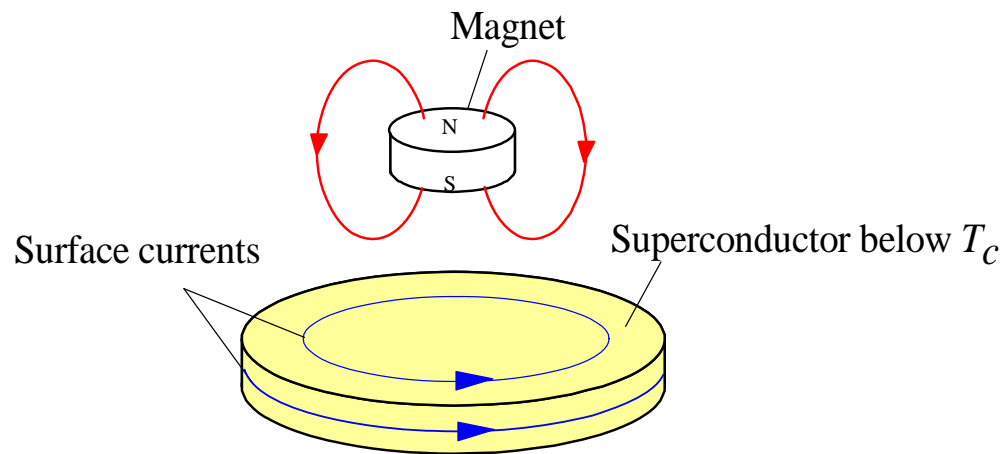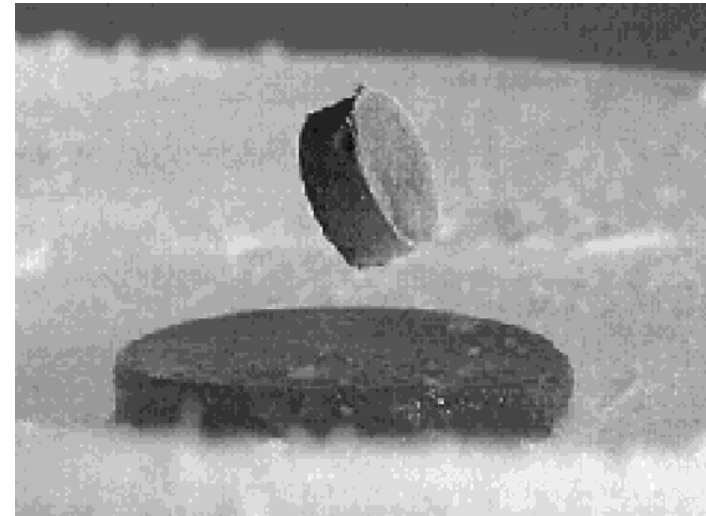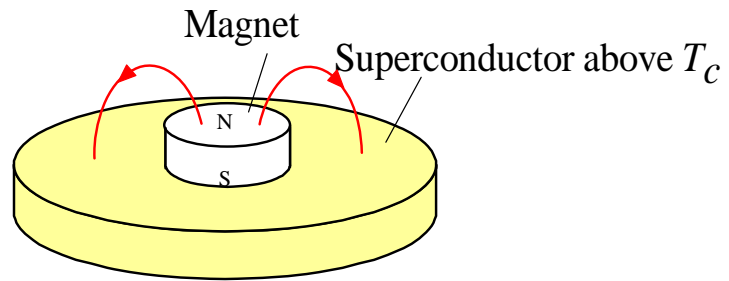

Future of transportation?

Type II superconductor:

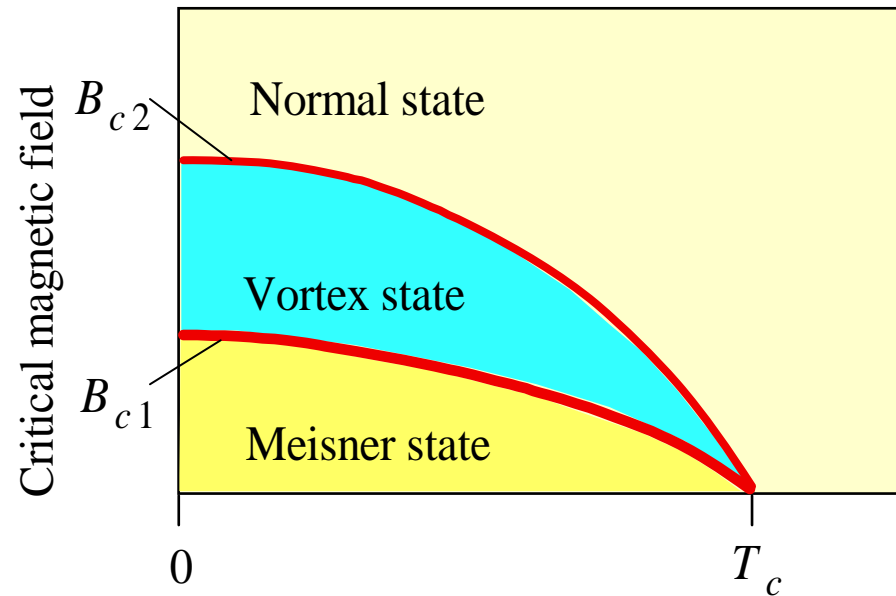


Fig. 8.50: Temperature dependence of B_{c1} and B_{c2} .

From *Principles of Electronic Materials and Devices, Second Edition*, S.O. Kasap (© McGraw-Hill, 2002)
<http://Materials.USask.Ca>

- For $\mu_0 H < B_{c1}$, Meissner state;
- $B_{c2} > \mu_0 H > B_{c1}$, mixed state;
- $\mu_0 H > B_{c2}$, normal state.

In the mixed state, the normal regions are in the form of small cylinders (filaments) that penetrate the sample. Each filament is a vortex (fluxoid) of flux lines.

- Magnetic field penetrate the superconductor in the form of a regular array of flux lines.

- A supercurrent circulates around the wall of each vortex.



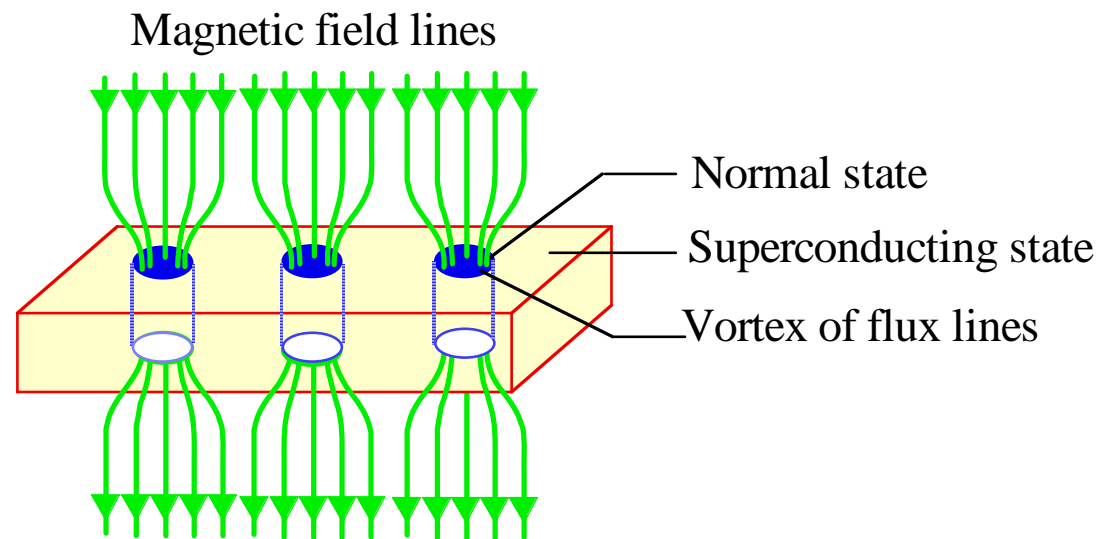


Fig. 8.49: The mixed or vortex state in a Type II superconductor.

Images of vortex lattice

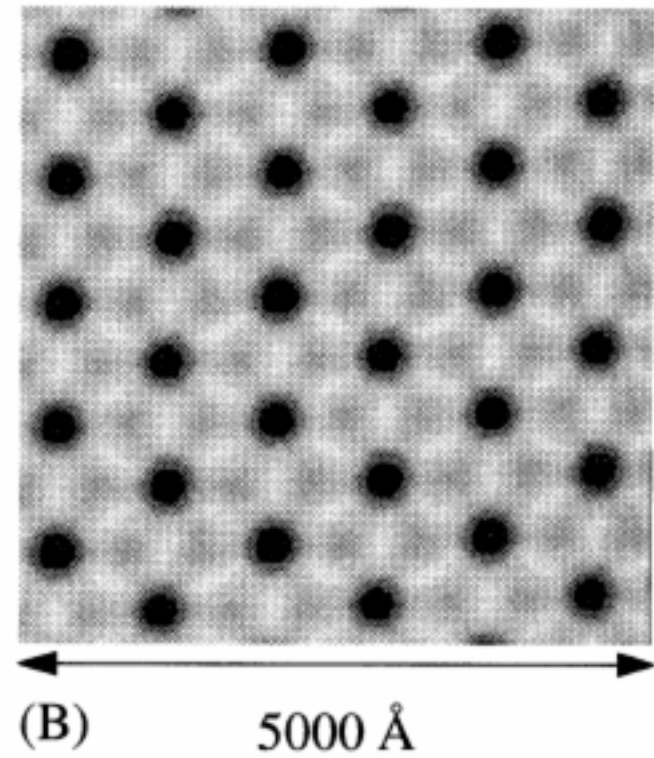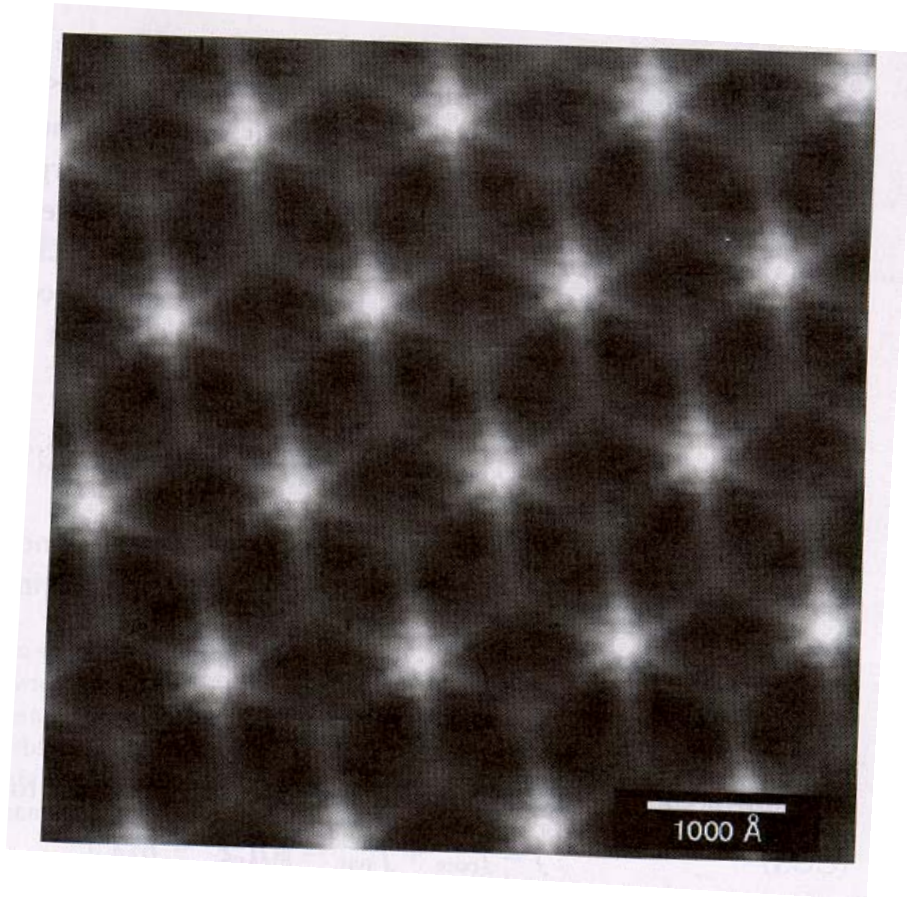


3. Specific Heat

i) Discontinuity at T_c

$$c_n - c_s = -\left\{ \mu_0 T V_m \left(\frac{dH_c}{dT} \right)^2 \right\}_{T=T_c}$$

→ Second order phase transition

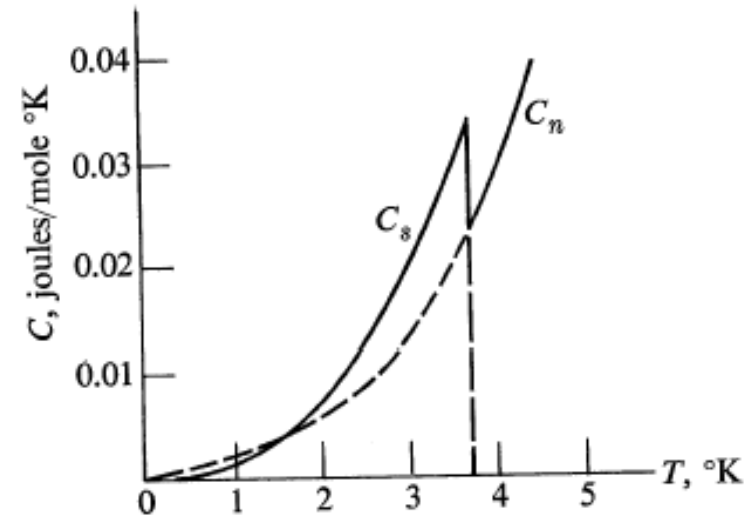


ii) Exponential T-dependence


$$c_s = a e^{-b(T_c/T)}$$

→ Energy gap at E_F !

$$E_g = 2\Delta \quad (\sim kT_c)$$

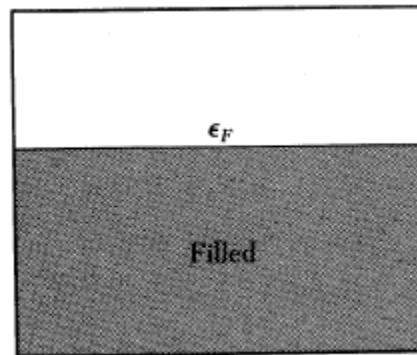

Normal

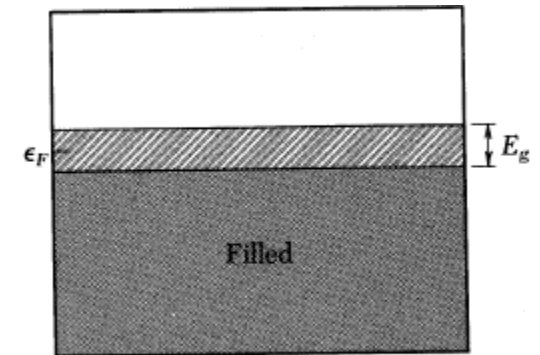

Superconductor


→
$$H_c(0) \approx \sqrt{\frac{2nk^2}{\mu_0 E_F}} T_c$$

- Two fluid model:

Conduction electrons in a superconductor can be divided into two classes: **superelectrons** and **normal electrons**.

Concentration of superelectrons:

$$n_s = n \left[1 - \left(\frac{T}{T_s} \right)^4 \right]$$

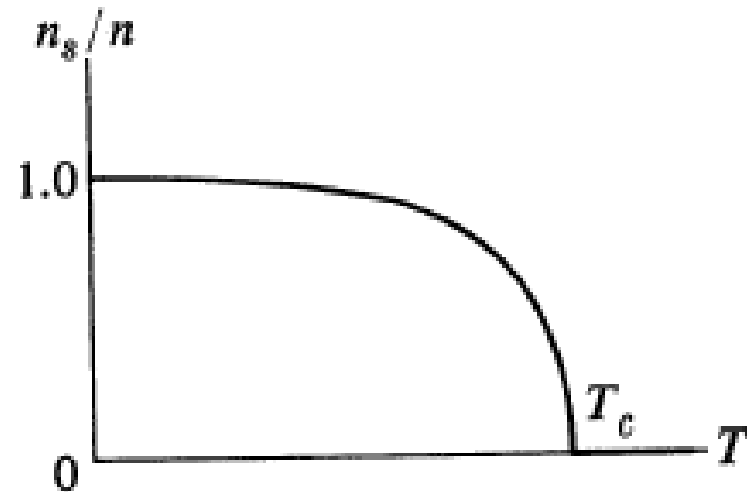

The superelectrons do not suffer any scatterings and have zero resistance, and short-circuit the normal electrons.

What's the difference between superelectrons and normal electrons???

4. Electrodynamics of Superconductors

i) Electric Field inside a superconductor is zero
 $E = 0$

ii) London Equation:


$$\vec{B} = -\frac{m}{n_s e^2} \nabla \times \vec{J}_s$$

$$\rightarrow B_y(x) = B_y(0) e^{-x/\lambda}$$

$$\lambda = \sqrt{m / \mu_0 n_s e^2}$$

λ : London penetration depth


Magnetic field does penetrate into a superconductor, but only to a small depth near the surface!

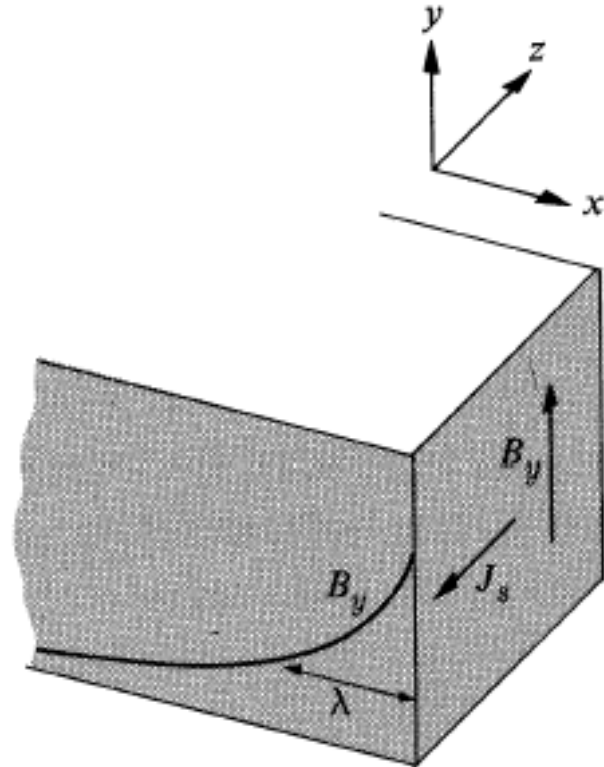

iii) T-dependence of λ

$$\lambda = \lambda(0) \left(1 - \frac{T^4}{T_c^4}\right)^{-1/2}$$

The field penetrates the entire sample at T_c (of course!).


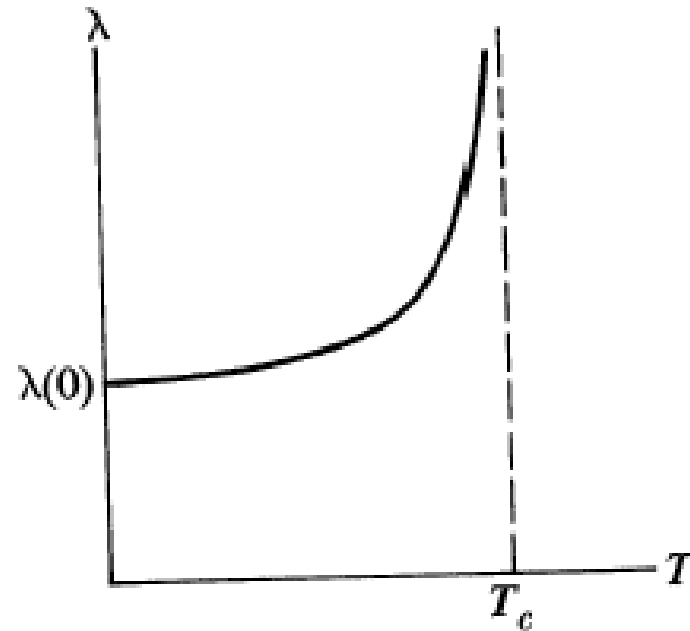


iv) Spatial distribution of supercurrent

$$J_z(x) = -\left(\frac{n_s e^2}{\mu_0 m}\right)^{1/2} B_y(x) = -J_s(0) e^{-x/\lambda}$$

The electric current flow in a superconductor is restricted to a surface layer of the depth of London penetration depth.


Field and current penetration:

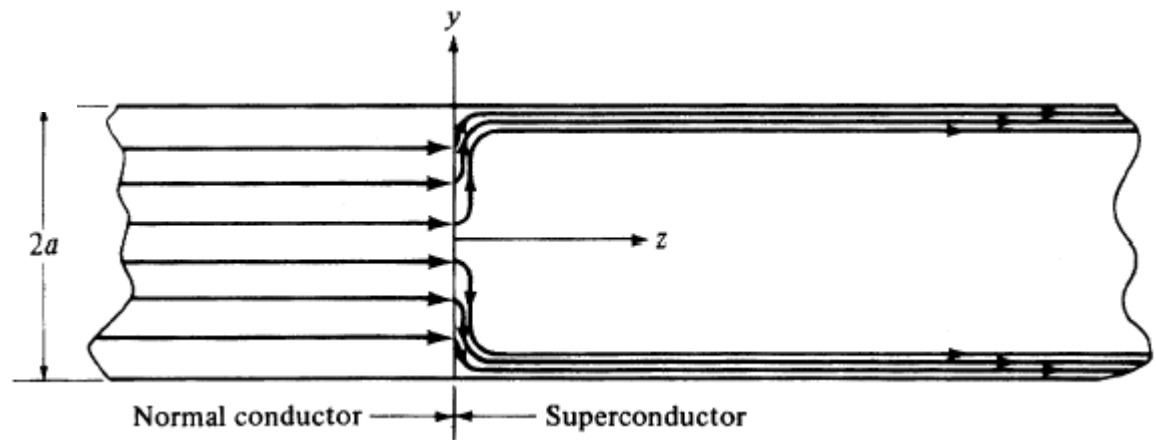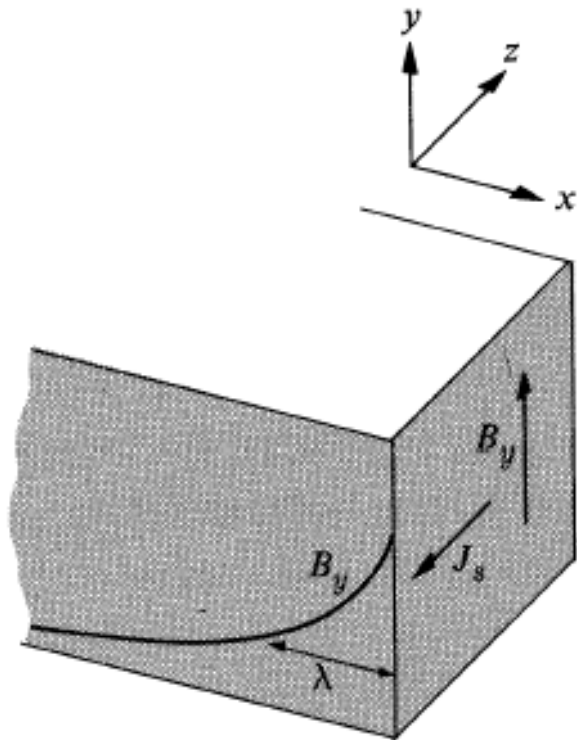

v) Concept of coherence length


The superconducting coherence, ζ , represents the extent of the superelectron wave function. Superconductivity cannot vary greatly over this distance.

$$\xi \approx \frac{\hbar}{\Delta p} \approx \frac{\hbar v_F}{2\Delta} \propto \frac{1}{T_c}$$

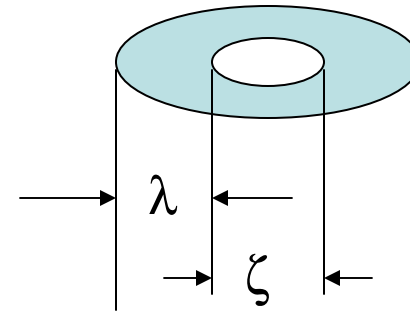

vi) Detailed picture of flux lattice

Each vortex has a normal core of diameter ζ and a circulating supercurrent around the normal core of depth λ .

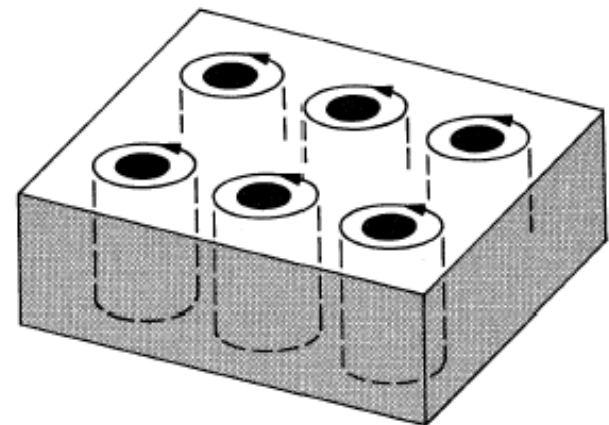

vii) Flux Quantization

The magnetic flux threading a superconducting ring is quantized:

$$\Phi = n \frac{h}{2e} = n\Phi_0$$

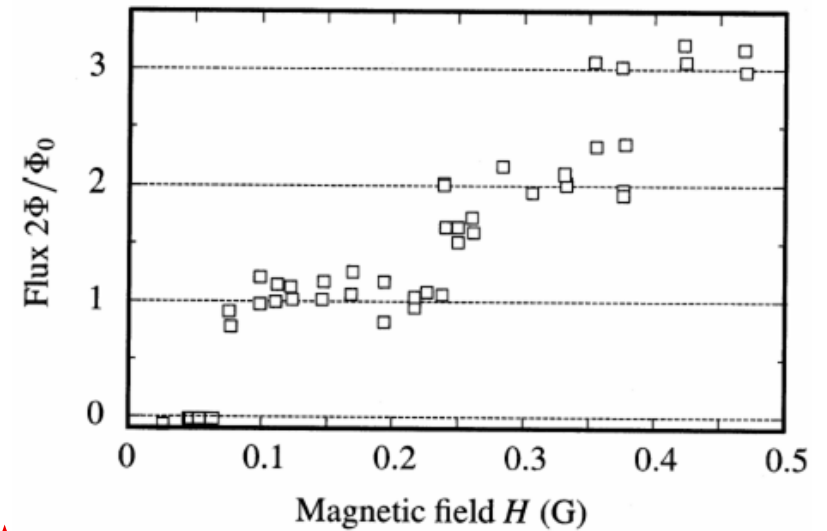
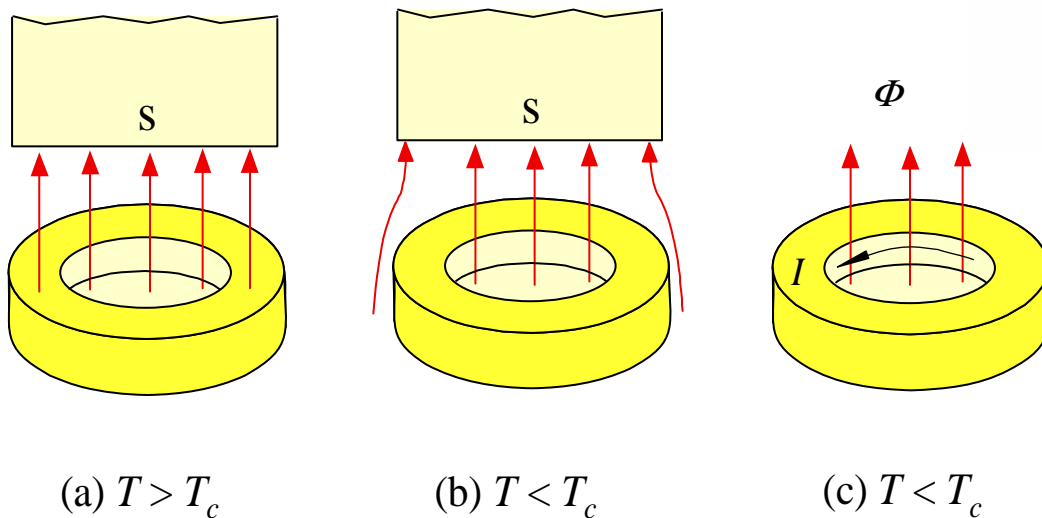


Fig: 8.60: (a) Above T_c , the flux line enter the ring (b) The ring

8.5 Origin of Superconductivity: BCS Theory

i) Cooper pairs

- The superelectrons form pairs;
- Each pair consists of two electrons of opposite momentum and spin ($\vec{k} \uparrow, -\vec{k} \downarrow$);
- Each electron in a pair has a lower energy (by amount of the energy gap Δ) than a normal electron \rightarrow condensation energy;


$$\Delta E \sim g(0)\Delta^2$$

- An energy of 2Δ is required to break up a Cooper pair;
- The Cooper pairs do not suffer any scattering and have zero resistance.

Where does the attraction come from???

ii) Attraction through **electron-phonon interaction**


One electron interacts with the lattice, distorts the lattice and creates a local positive net charge, which attracts a second electron nearby.

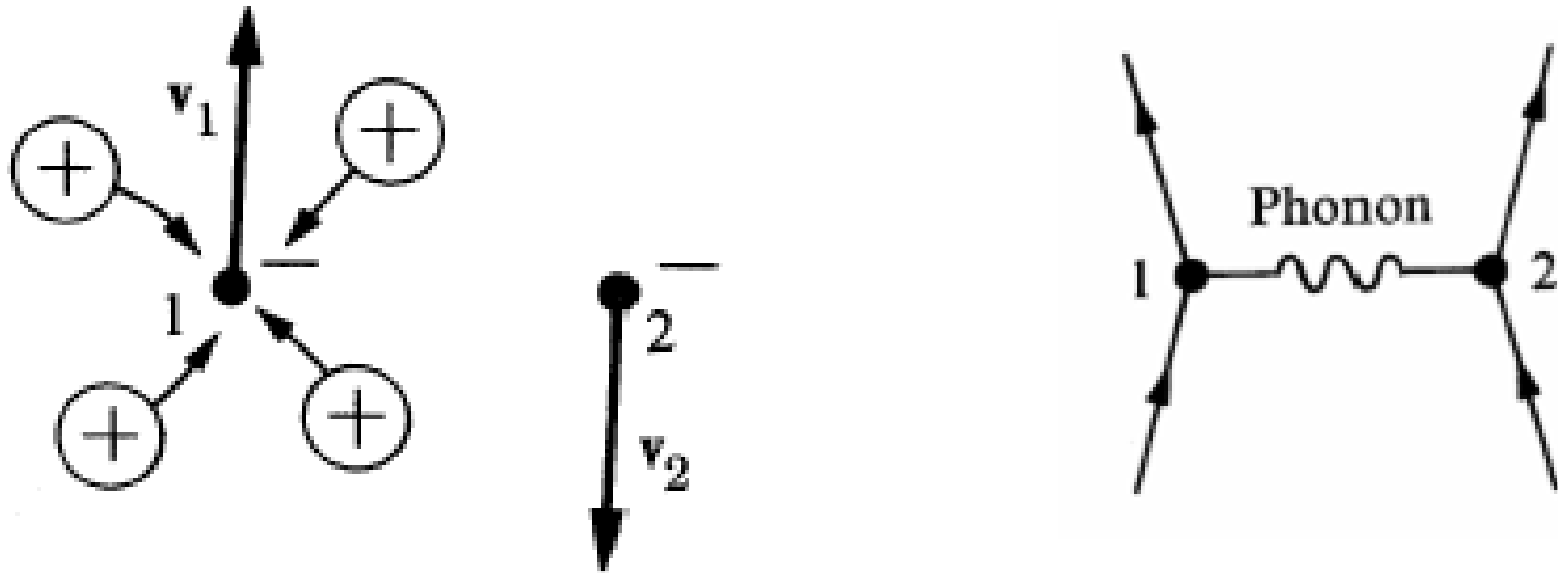

Consequences of BCS theory:

i) Electronic DOS of a superconductor:

$$g(E) = g_n(E) \frac{|E|}{\sqrt{E^2 - \Delta^2}}$$

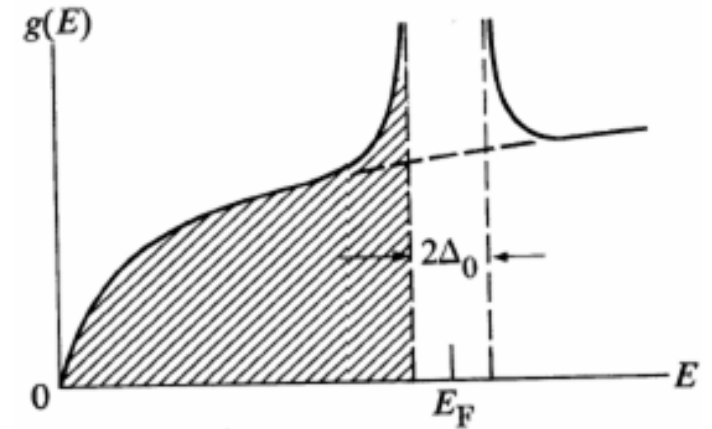

ii) θ_D : Debye temperature


ω_D : Debye frequency

V' : strength of electron-phonon interaction

$$T_c = 1.14\theta_D \exp\left[-\frac{1}{g(E_F)V'}\right]$$

$$\Delta = 2\hbar\omega_D \exp\left[-\frac{1}{g(E_F)V'}\right]$$


$$\frac{2\Delta}{kT_c} \approx 3.5$$

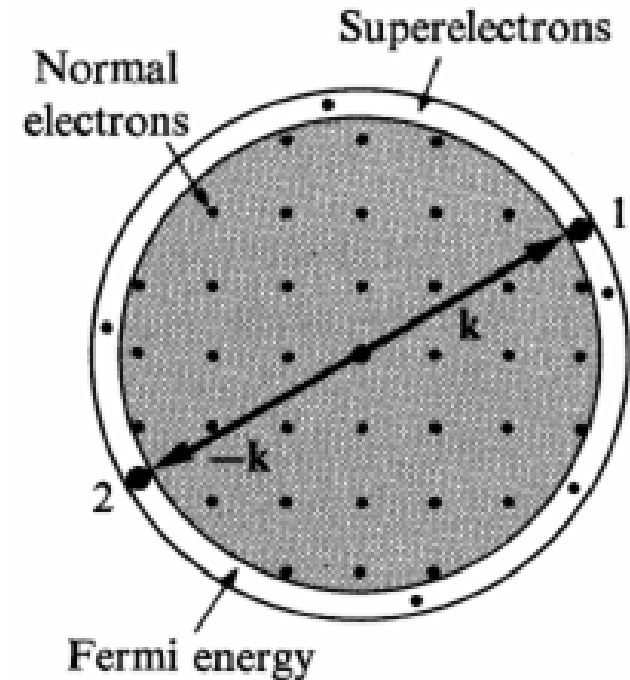

iii) Large V' means higher T_c , but also higher resistivity in the normal state. \rightarrow bad metals make good superconductors!

iv) Since $\omega_D \propto M^{-1/2}$ higher T_c for lighter masses \rightarrow isotope effect.

v) Temperature dependence of the energy gap



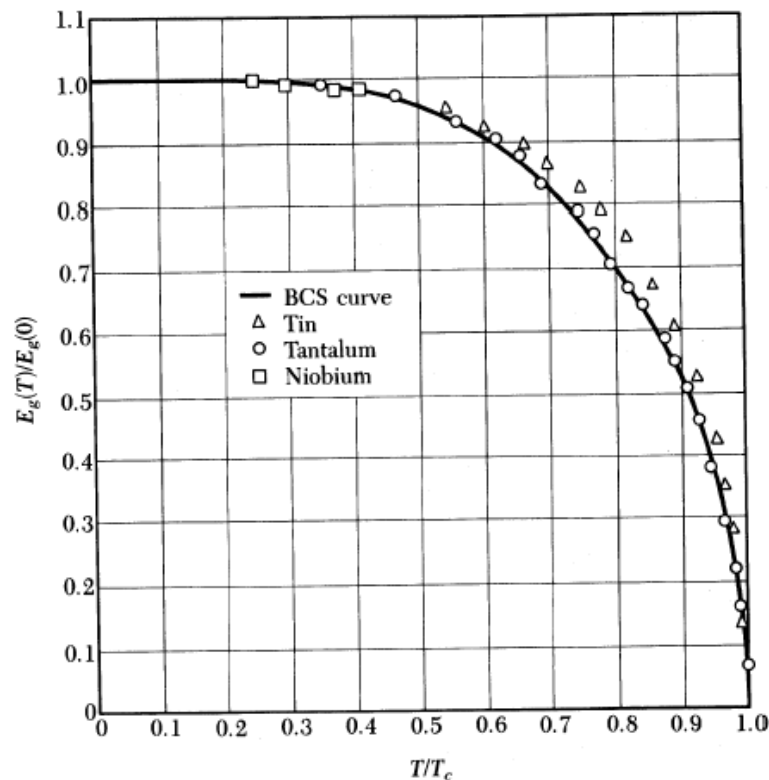


$$\frac{\Delta(T)}{\Delta_0} = \tanh\left[\frac{T_c \Delta(T)}{T \Delta_0}\right]$$

8.6 Superconducting Junctions

i) superconductor/normal metal (S/N): **Andreev Reflection**

How do electrons in N get into S?

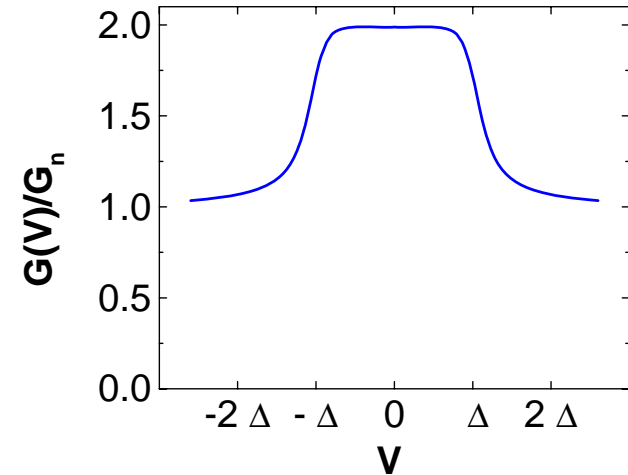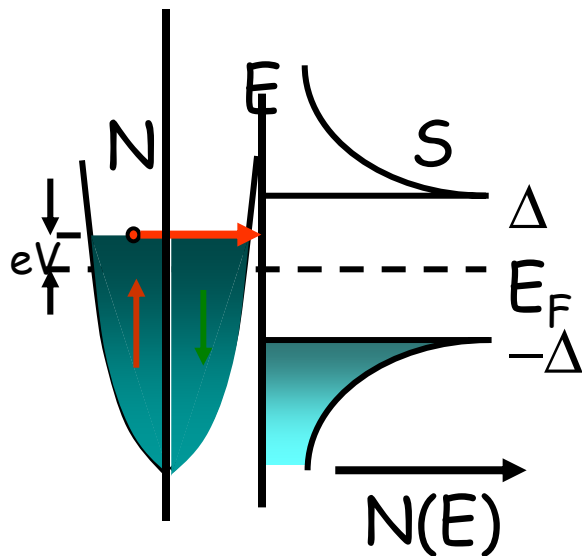




By pairing up with an electron of opposite momentum and spin, thus forming a Cooper pair and get into S. A hole has to be reflected back in N (why?). → Andreev reflection

v) Macroscopic quantum interference: **SQUID**

(**S**uperconducting **Q**Uantum **I**nterference **D**evice)

A loop containing two Josephson junctions, and the total critical current through the loop is modulated by the magnetic flux thread the loop.

$$I_T = I_{c1} \sin \phi_1 + I_{c2} \sin\left(\phi_1 - \frac{2\pi\Phi}{\Phi_0}\right)$$

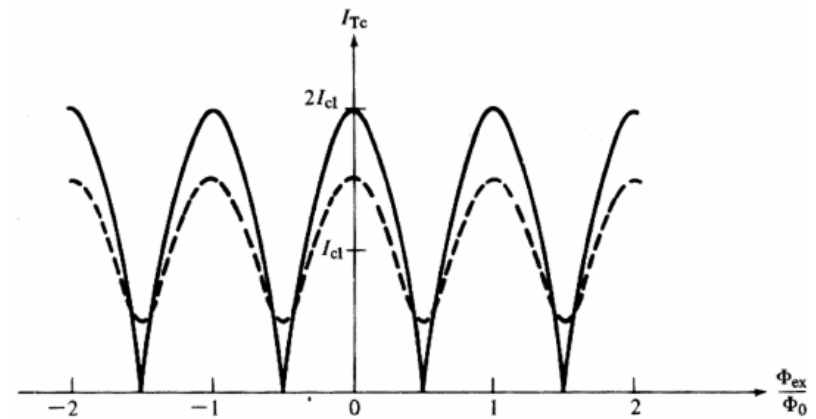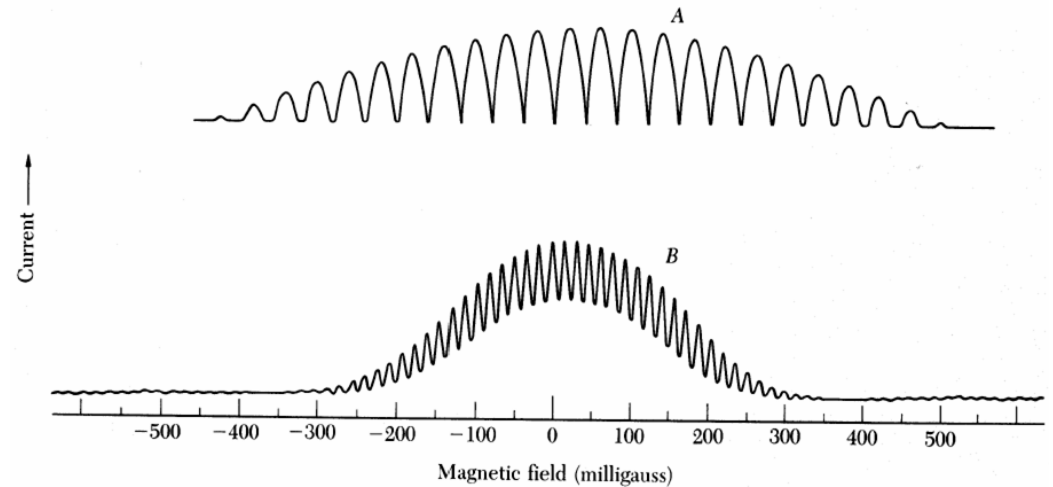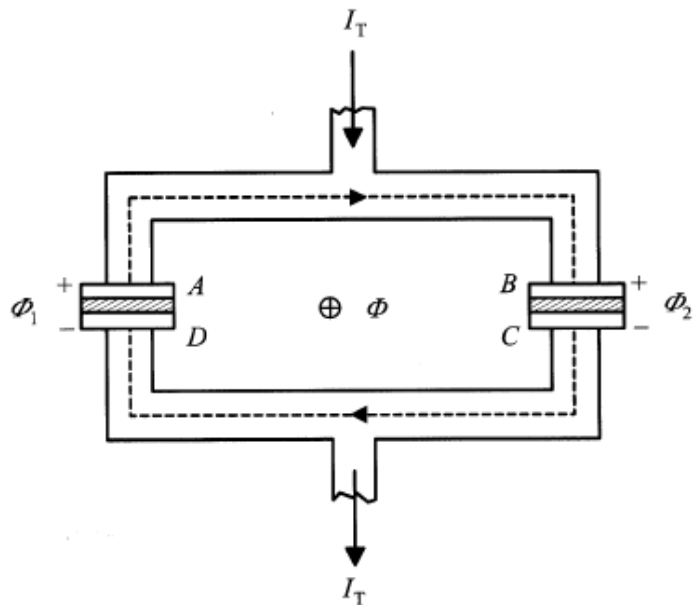

Most sensitive detector of magnetic flux and magnetic field.